

AERIAL ELEVATING WORK PLATFORM
JINWOO 540M



1,374mm




3,800mm



JINWOO 540M

OPTIMIZED FOR THE NARROW & CONSTRAINED SPACE


- Short span Outrigger extension(1.4m) and compact transport dimension.
- Minimal Boom's bending as its produced from high-tensile special treated steel.
- All-chain type Boom operations for enhanced safety & minimal drooping.
- 2-stage Boom extension with program-controlled dual Extension cylinders.
- Minimized moment with enhanced 9-stage cadence Hexadecagon Booms (16 edges).

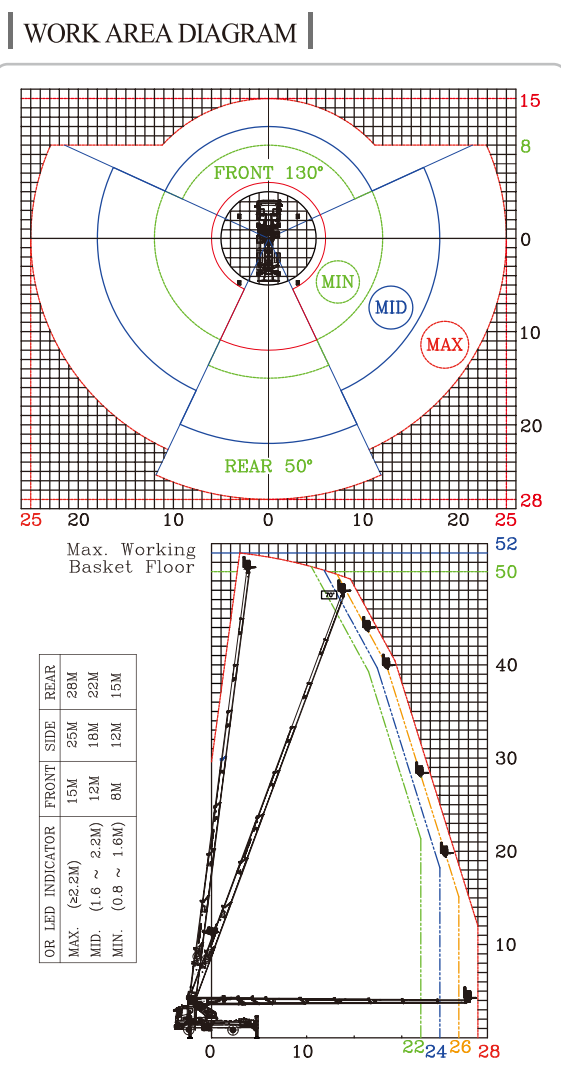

SPECIFICATION

JINWOO540M SPECIFICATION			
Contents	Unit	Data	Remarks
Permissible Mounting Vehicle	Ton	Min. 18.0 GVW	4x2
Max. Working Load	Payload	kg	400 (OPTIONAL 400Kgs Crane Winch)
	Length	mm	9,010
	Height	mm	3,980
Product's Dimension (with Vehicle)	Width	mm	2,495
	Max. Height	m	52
Working Area	Max. Outreach	m/kg	Rear : 22 - 400 / 28 - 100 Left/Right : 19 - 400 / 25 - 100 Front : 12 - 400 / 15 - 100
	Dimension (L x D x H)	mm	1,830 * 500 * 1,100 3,230 * 1,030 * 1,100
Work Platform	Rotation Angle	deg.	360deg. Continuous
	Type		HexaDecagon
Boom	Number of Booms		9
	Extension		Hydraulic Cylinders, Chain
Turntable Rotation	Type		By Hydraulic Reduction Gears
	Rotation Angle	deg.	350 (±175)
Hydraulic Pump Drive Type	Engine		P.T.O
	Width	mm	Front : 7,610 ; Rear : 6,630
Outrigger	Extension		Hydraulic Cylinders, Wires
	Type		X-A
Operations and Controls	Type		Manual Lever
	Remote control		Portable Radio Wireless

Note : The above specifications are bound to change without prior notification for better operators safety and due to changes in truck specifications.

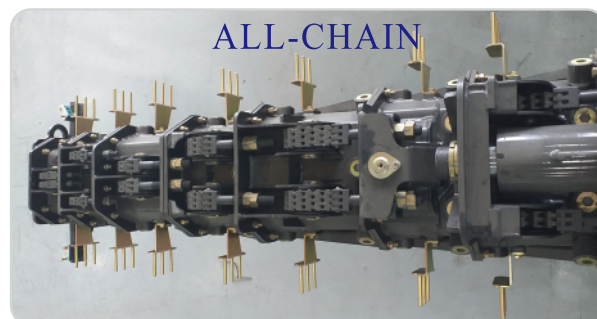

Distributor

NB Equipments & Engineering Pvt. Ltd.

513 - Tower B, Lodha Supremus, Kolshet Road, Thane West - 400 607.

Tel: +91 22 49681206 / 703900027. Mob.: +91 9975747804 Web : <http://www.nbee.in> Email : info@nbee.in / sales@nbee.in